

Eltek Cooling Box

Type C2

Eltek is a world leader in the development of telecom power systems / solutions that are designed to meet the rapid growth within the field of telecommunication, as well as the increasingly stringent reliability requirements. A key to this reliability in the outside plant is creating a cool, dry and secure environment for the electronics. The Eltek Cooling Box incorporates an optimized thermal system controller and a high efficient Fan and Filter Solution that will keep even the most sensitive electronics functioning.



ELTEK COOLING BOX

TYPE C2

Doc 2142101 – rev2

PRODUCT DESCRIPTION

Eltek's cooling box (ECB) is a cost effective and power saving solution for cooling and OPEX saving initiatives for the modernization of Telecom Shelters.

The ECB has the advantage that a large amount of ambient air can be filtered / exchanged, giving very high cooling performance with low power consumption while maintaining the internal environmental temperature, dust and humidity.

The ECB when used with Eltek's SmartPack Controller technology enables a total shelter environmental control including any installed box, split type or Inverter type Air conditioner.

APPLICATIONS

- Telecom BTS 2G,3G,4G (LTE) Shelter
 - Repeater Station
 - Wimax
 - Broadband
- GSMR
- Industrial

KEY FEATURES

- GALVANISED STEEL CONSTRUCTION
- LOW COST SINGLE BOX SOLUTION FOR ALL TYPES OF SITES.
 - New sites, Modernization of existing sites
- LIGHT WEIGHT AND EASY TO INSTALL.
- UNIQUE FAN SPEED DESIGN
 - Full speed control 0 to 100%
- MAXIMIZE FAN LIFE WITH REDUCE MAINTENANCE COSTS.
- DELTA ΔT TRACKING.
 - Internal temperature probe, External temperature probe and-Humidity sensor (optional)
- HORIZONTAL MOUNTING AIR FLOW
- DATA LOGGING USING ELTEK SMARTPACK CONTROLLER
 - Temperature logging: Indoor, Outdoor, Fan speed and Event Logger (ACU Run Time)
- EVENT & DATA LOGGER FILES RETRIEVABLE BY USING SD CARD
- ALARMS: FAN FAIL, HIGH TEMP, MCB TRIP, FILTER BLOCK (OPTIONAL), SYSTEM SHUTDOWN (FIRE CONTROL - OPTIONAL)
- ABLE TO CONTROL EXISTING AIRCON SYSTEM (MAX 2)
- COMPLETE SITE OVERVIEW
 - locally and remotely with Multi-Site Monitoring (Web Power , LAN connection)
- ONE CONTROLLER FOR ALL SITE FUNCTIONS
 - Basic control - I/O Monitor Type 3
 - Advanced control – Smartpack 1 or 2 + I/O Monitor Type 3

TYPE C2


INPUT DATA	48VDC	24VDC
Air Flow	2000m ³ /h	2000m ³ /h
Power (Avg)	198 W (with zero pressure drop)	233 W (with zero pressure drop)
Cooling Capacity ($\Delta T=2.5^{\circ}\text{C}$) ($\Delta T=5^{\circ}\text{C}$) ($\Delta T=10^{\circ}\text{C}$)	1.5 KW Heat Load 3.0 KW Heat Load 6.0 KW Heat Load	1.5 KW Heat Load 3.0 KW Heat Load 6.0 KW Heat Load
DC Current (Max)	5.5 A	14.6 A
DC Input	36-57 V	16-32 V
Fan	<ul style="list-style-type: none"> o backward curved blades offering an extreme aerodynamic airflow efficiency o Impeller: sheet aluminum, laser-welded Rotor: coated in black o control input 0-10 VDC / PWM o tach output o over-temperature protected motor o reverse polarity and locked-rotor protection, rotation is CW. 	
CF Filter Series (Std)	G4: 1.1 m ² [EN779] at Max 200PA and 2600m ³ /h	
EF Filter series (washable filter options)	G4: 1.0 m ² [EN779] at Max 250PA and 2500 m ³ /h	
Operating temperature	-20 to +65 °C	
Operating Humidity	RH 0-95%	
Weight	Approximately 21 kg	
CONTROLLER SPECIFICATIONS		
Basic Control	Standalone - I/O Monitor Type 3	
Dual Control	1 Controller can control 2 ECB Fans	
Advanced Control	Smartpack 1, 2 + I/O Monitor Type 3	
Alarms	<ul style="list-style-type: none"> o Relay Alarming N/O – N/C o Configurable Inputs / Outputs o Climate Control o Filter Clog (optional) o System Shutdown (Fire Control - optional) 	
Event Log	<ul style="list-style-type: none"> o Alarm Log o ECB On/Off o ACU On/Off 	
Data Logging SP1 or SP2 Integrated (See configuration)	<ul style="list-style-type: none"> o Temperature (Indoor, Outdoor) o Fan Speed o Fan Deviation 	
CONSTRUCTION SPECIFICATIONS		
ECB	Galvanised Steel	
Filter Change	Removable access panel for fast filter change	
Filter Detection	Optional: sends an alarm when filter gets clogged	
Fire Alarm Relay	Optional: receives alarm signal from external input and deactivate the fan	
Security	Minimum intrusion risk with no external exposed fixings or access	
Exhaust Damper Outlet (std)	99.9% reliable pressure damper with internal & external bug traps	
PHYSICAL SPECIFICATIONS		
ECB	H x W x D: 400 x 502 x 490 (mm)	
Exhaust Damper	H x W x D: 370 x 400 x 310 (mm)	
Temperature Probe Cable Lengths	5 Meters	
DESIGN STANDARDS		
Electrical Safety	EN 60950-1 : 2006 + A11:2009 + A1:2010 + A12:2011	
EMC	ETSI EN 300 386 V1.5.1 : 2010 EN 61000-6-1 : 2007, EN 61000-6-2 : 2005, EN 61000-6-3 : 2007 + A1:2011, EN 61000-6-4 : 2007 + A1:2011	
Environment	RoHS and WEEE compliants	

Specifications are subject to change without notice

ELTEK COOLING BOX

TYPE C2

ELTEK COOLING BOX TYPE C2 MOUNTING

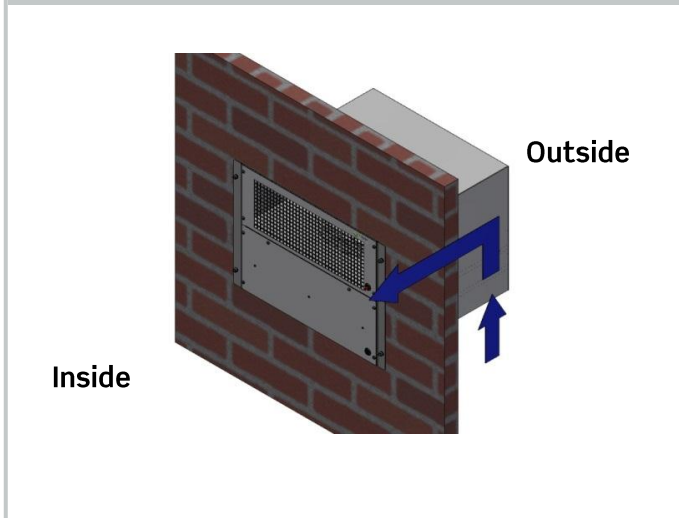

EXHAUST DAMPER WITH COVER



Configuration	IFS Part Number (48VDC)	IFS Part Number (24VDC)
Fan & ACU mode Integrate into new/existing rectifier system - G4 CF Filter	ECB0103.003	TBA
Fan & ACU mode Standalone ECB with control box (Note: includes CAN Power) - G4 CF Filter	ECB0103.004	TBA
Fan & ACU mode Standalone ECB with control box & SP2 as display (Note: includes CAN Power) - G4 CF Filter	ECB0103.006	TBA
Fan & ACU mode Standalone ECB with control box & SP2 as display (with Filter Block Detector & Fire Alarm Relay) (Note: includes CAN Power) - G4 CF Filter	ECB0103.116	ECB0203.116
Consumables		
Part Number (Filter Options)	<ul style="list-style-type: none"> ○ 287628 ○ 290201 	<ul style="list-style-type: none"> G4 Filter 495 x 455 x 45 CF G4 Filter 495 x 455x 48 EF