



RECTIFIER

PSR327

In: 230 VAC

Out: 110 VDC (2.7 kW)

KEY FEATURES

- **Single-phase module 1/4 x 19", 3U with sinusoidal input current (PFC)**
- **Very wide input frequency range**
- **Input overvoltage protection**
- **"Hot plug-in" design with backplane connection**
- **High power density**
- **CAN-Bus interface**
- **Integrated decoupling from the DC bus**
- **Front-to-rear airflow with temperature-controlled fan cooling**
- **Suitable for Pb and NiCd batteries**

PRODUCT DESCRIPTION

Power supply modules of series PSR327 are compact battery charging rectifiers with an optimized switching principle and therefore with very high power density. The rectifier can be used in all DC applications with or without back-up battery.

Due to the modular concept and high scalability the user is able to equip the power supply with additional modules according to his actual power profile. The chargers are very user friendly and can be swapped and upgraded during operation.

The devices get their operation parameters via the system wide CAN communication bus. After a successful login a central monitoring unit controls and monitors the devices. In case of CAN-Bus interruption the modules operate continuously with internal default values. The current sharing between the rectifier modules operates independent of the CAN communication bus.

Up to four modules can be integrated in a 19" sub rack with 3U (108 V/100 A).

APPLICATIONS





DC power supply facilities with or without back-up battery in all areas of industry, power generation and power distribution.




TECHNICAL DATA

Type	PSR327/110-25
Article code	101-027-178.00
Nominal input voltage	230 VAC ± 20 %
Nominal input current	12.9 AAC
Input frequency range	16% to 60 Hz (+5 %)
Power factor	>0.99 at Pnom >50 %
Total harmonic distortion	<5 %
Efficiency	≥ 91 %
Internal input fusing	16 A (6.3 x 32 mm)
Nominal output voltage	108 VDC
Nominal output current @ 108 V	25 ADC
Nominal output power	2.7 kW
Charge characteristic	IV characteristic according to DIN41772/DIN41773; power limited
Adjustable output voltage range	87 - 150 VDC
Default value of the charging voltage (factory set)	122.6 VDC (2.27 V/cell; lead acid battery); by CAN dongle settable for NiCd batteries
Output over voltage Vo> (factory set)	135 VDC (2.5 V/cell; lead acid battery); by CAN dongle settable for NiCd batteries
Voltage ripple	≤ 100 mVpp
Dynamic accuracy of the charging voltage	<3 % Vnom at load changes between 10 % - 90 % - 10 % Inom; transient time ≤ 1.5 ms
Short circuit protection	Continuous short circuit proof; 1 x Inom
Parallel operation	Yes; current sharing ≤ 10 % Inom
Internal decoupling at the output	Yes, in the positive output line
Internal output fuse	30 A
LED signalling	Operation (green), Vo OK (green), Vo> (red), Alarm (red)
Main processor	16Bit Fujitsu
Isolated signalling contacts	"General fault"; relay COM/NO/NC, maximum contact load: 60 VDC/500 mA
Communications interface	CAN-Bus, proprietary protocol
Ambient temperature	Operation: -20 °C to +55 °C, storage: -40 °C to +85 °C
Cooling	Fan cooling (temperature-controlled, r.p.m.-monitored)
Climatic conditions	according to IEC 721-3-3 class 3K3/3Z1/3B1/3C2/3S2/3M2
Max. installation altitude	≤ 1500 m
Audible noise	<45 dB (A)
Type of construction	1/4 x 19", 3U
Dimensions (W/H/D)	106.3/133/326.5 mm
Weight	approx. 3.9 kg
Type of enclosure / Protection class	IP20 (front panel) / 1
Colour	Front panel: RAL 7035, neutral, black print RAL 9005
CE conformity	yes
Compliance to safety standards	EN60950-1; VDE0100 T410; VDE0110; EN50178; EN60146
Compliance to EMC standards	EN55022/24 (ITE), class "A"; EN61000-4 T2-5
Electrical connector	AC input, DC output and signalization: DIN41612-M-connector

OPTIONS

Article code	View	Designation
102-327-318.HV01		Assembly set 19" sub rack 3U incl. backplane for 3 pcs. rectifiers PSR327/110 V and 1 pcs. DC controller UPC3-110 V; connection board DCC-CB1 included in delivery.
102-327-408.HV01		Assembly set 19" sub rack 3U incl. backplane for 4 pcs. rectifiers PSR327/110 V
301-003-798.02		Monitoring, controlling and signalling unit (DC controller) UPC3-110 V
302-DCC-CB1.00		Connection board, necessary to connect all measuring, control and signalling wires over the sub rack to the UPC3 (MSTB screw terminals) (Spare part)
881-MEC-BPL.03.21.B		Cover plate (with handle) to cover not used PSR slots, 1/4 x 19", 3U; RAL 7035
880-CAN-DNG.00		CAN dongle, supplied by CAN-Bus, 12V, incl. software

DIMENSIONS

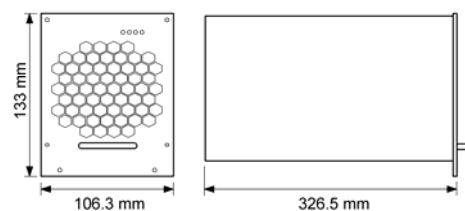

DS_PSR327_110V_2009_E_R02 - Subject to change without notice - Eltek Valere Industrial GmbH

Eltek Valere Industrial GmbH
Schillerstrasse 16
D-32052 Herford
Tel: +49 52 21 17 08 200
info.industrial@eltekvalere.com
www.eltekvalere.com

Finland
Eltek Energy Oy
Tel: +35 820 779 88 20
France
Eltek - SFEE SA
Tel: +33 562 340 930
Germany
Eltek Valere Industrial GmbH
Tel: +49 52 21 17 08 200
Eltek Valere Deutschl. GmbH
Tel: +49 694 2002 0

Norway
Eltek Valere AS
Tel: +47 32 20 32 00
Poland
Eltek Polska Sp. z o.o.
Tel: +48 914 852 440
Russia
OOO Eltek St. Petersburg
Tel: +78 123 321 117
Slovakia
Eltek Energy Slovakia s.r.o.
Tel: +42 144 520 1607

Spain
Eltek Energia S.A.
Tel: +34 914 920 660
Sweden
Eltek Energy AB
Tel: +46 862 664 20
Aliab DC Systems AB
Tel: +46 54 68 81 50
United Kingdom
Eltek Energy (UK) Ltd
Tel: +44 144 22 193 55

Australia
Eltek Pacific Pty Ltd
Tel: +61 294 794 200
Bangladesh
Eltek Energy Pte Ltd
Tel: +88 017 2097 097
India
Eltek SGS Pvt Ltd
Tel: +91 124 221 00 18
Malaysia
Eltek Energy (M)Sdn Bhd
Tel: +60 179 815 866/74 552

Pakistan
Eltek Energy AS Pakistan
Tel: +92 512 853 149
Philippines
Eltek Energy Incorporated
Tel: +63 291 063 55
Singapore
Eltek Energy Pte Ltd
Tel: +65 773 23 26
Thailand
Eltek Energy Incorp 2005 Ltd
Tel: +66 294 369 05

UAE
Eltek Middle East
Tel: +97 148 871 176
China
Eltek Energy Technology Ltd
Tel: +86 769 226 511 08
Hong Kong
Eltek Energy Ltd
Tel: +85 228 982 689
Brazil
Eltek Sistemas de Energia
Tel: +55 116 487 56 56

Colombia
Eltek Energy LLC
Tel: +57 162 216 91
USA
Eltek Energy LLC
Tel: +18 154 599 100
Mexico
Eltek Energy International
Tel: +52 55 53 74 1842
Peru
Eltek Energy de Peru SRL
Tel: +51 142 192 71